


Approximately 63 lbs./100 sq. ft. (3.7 kg/m²)
 When clipped bar mats are used, each bar intersection shall be clipped with W1.7 (3.74) wire.

Approximately 63 lbs./100 sq. ft. (3.07 kg/m²)

TYPE B

TYPE A

* When the 12 (300) minimum cannot be achieved, the transverse joints shall be extended to either the longitudinal joint or edge of pavement.

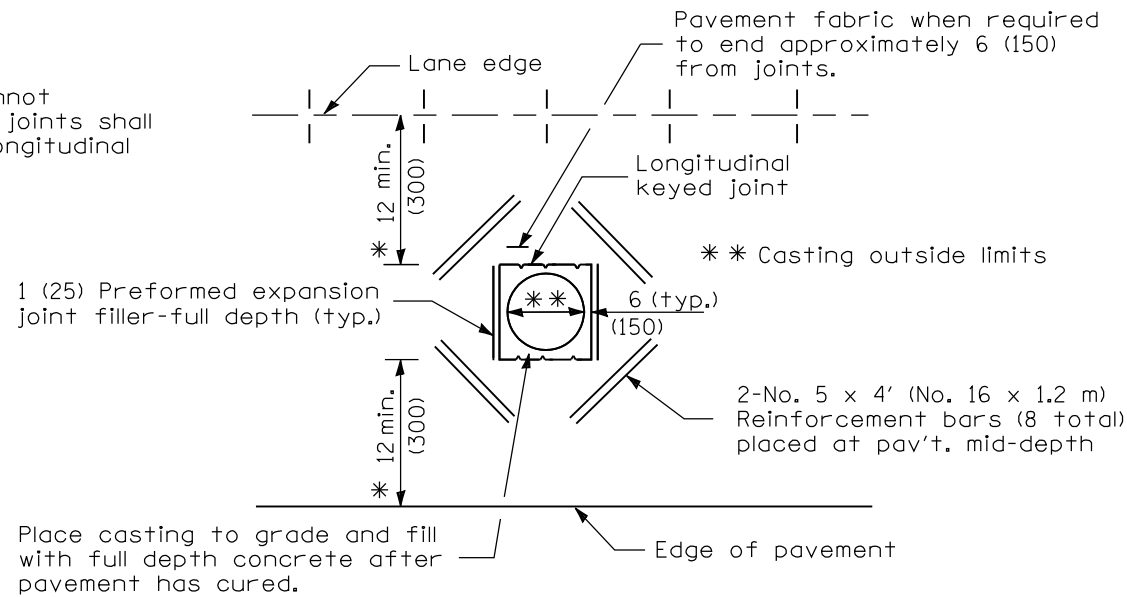

Place casting to grade and fill with full depth concrete after pavement has cured.

DETAIL OF ADDED REINFORCEMENT FOR PAVEMENT BLOCK-OUTS

GENERAL NOTES

Pavement block-outs shall be at least 24 (600) from contraction joints.

Pavement fabric which is lapped longitudinally shall have a minimum lap of 6 (150).

Pavement fabric may be positioned with the transverse wires on top or bottom of the longitudinal wires.

All dimensions are in inches (millimeters) unless otherwise shown.

DATE	REVISIONS
1-1-08	Switched units to English (metric).
1-1-04	Minor corrections of joint information

PAVEMENT FABRIC

STANDARD 420701-02

Illinois Department of Transportation

PASSED January 1, 2008
 ENGINEER OF POLICY AND PROCEDURES

APPROVED January 1, 2008
 ENGINEER OF DESIGN AND ENVIRONMENT

ISSUED 1-1-97